



- 32 AMP SINGLE PHASE CONNECTOR
- 32 AMP THREE PHASE CONNECTOR
- 63 AMP THREE PHASE CONNECTOR
- 200A "POWERLOCK" CONNECTOR FOR EVENTS AUDIO/LIGHTING
- I TENSION WIRE SPOOL LOCATION
- TENSION WIRE CONNECTION LOCATION

ELEVATION A

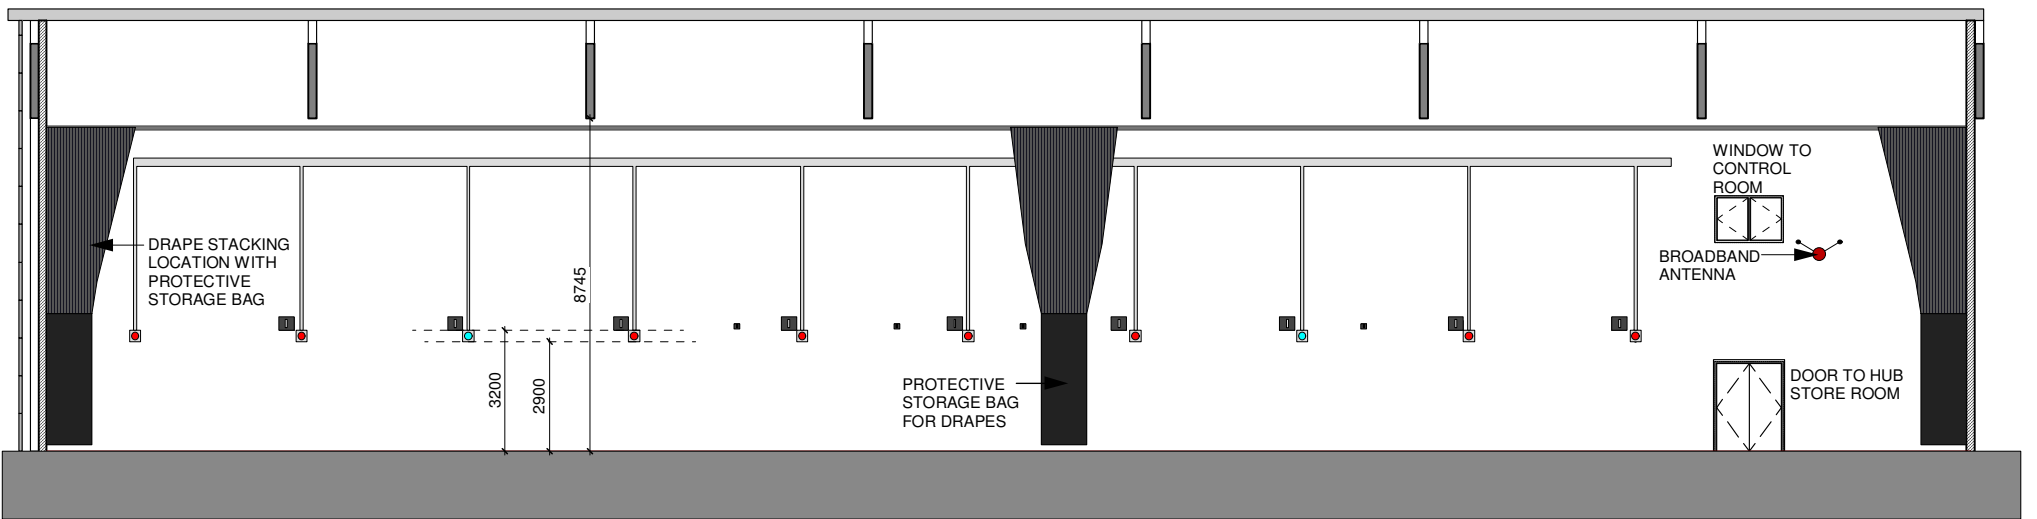

ELEVATION B

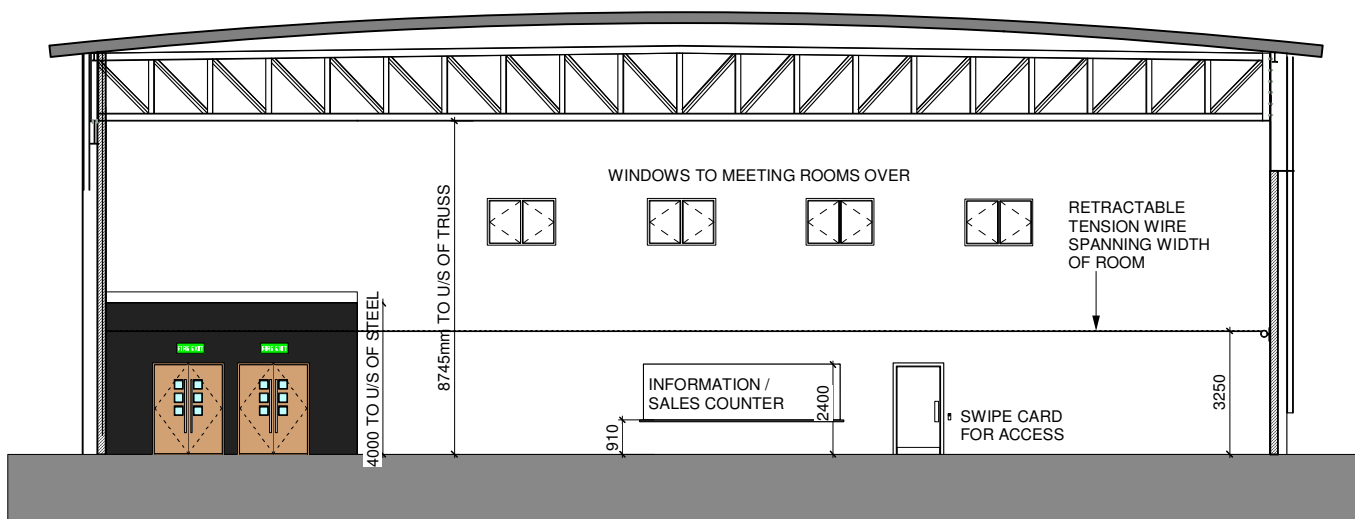


TRUSS LOADINGS

POINT LOAD:
THE MAXIMUM POINT LOAD ALLOWABLE AT ANY SINGLE LOCATION ON TRUSS IS 100KN.
***THIS WOULD BE THE ONLY LOAD ALLOWABLE ON THIS TRUSS.**

UDL LOAD:
THE TRUSSES HAVE A CAPACITY TO CARRY A UNIVERSALLY DISTRIBUTED LOAD OF 1kN/m²

***N.B. PLEASE NOTE:**
ALL LOADINGS TO TRUSSES TO BE APPROVED BY CILLIN HILL CENTRE MANAGEMENT PRIOR TO INSTALLATION

ELEVATION C

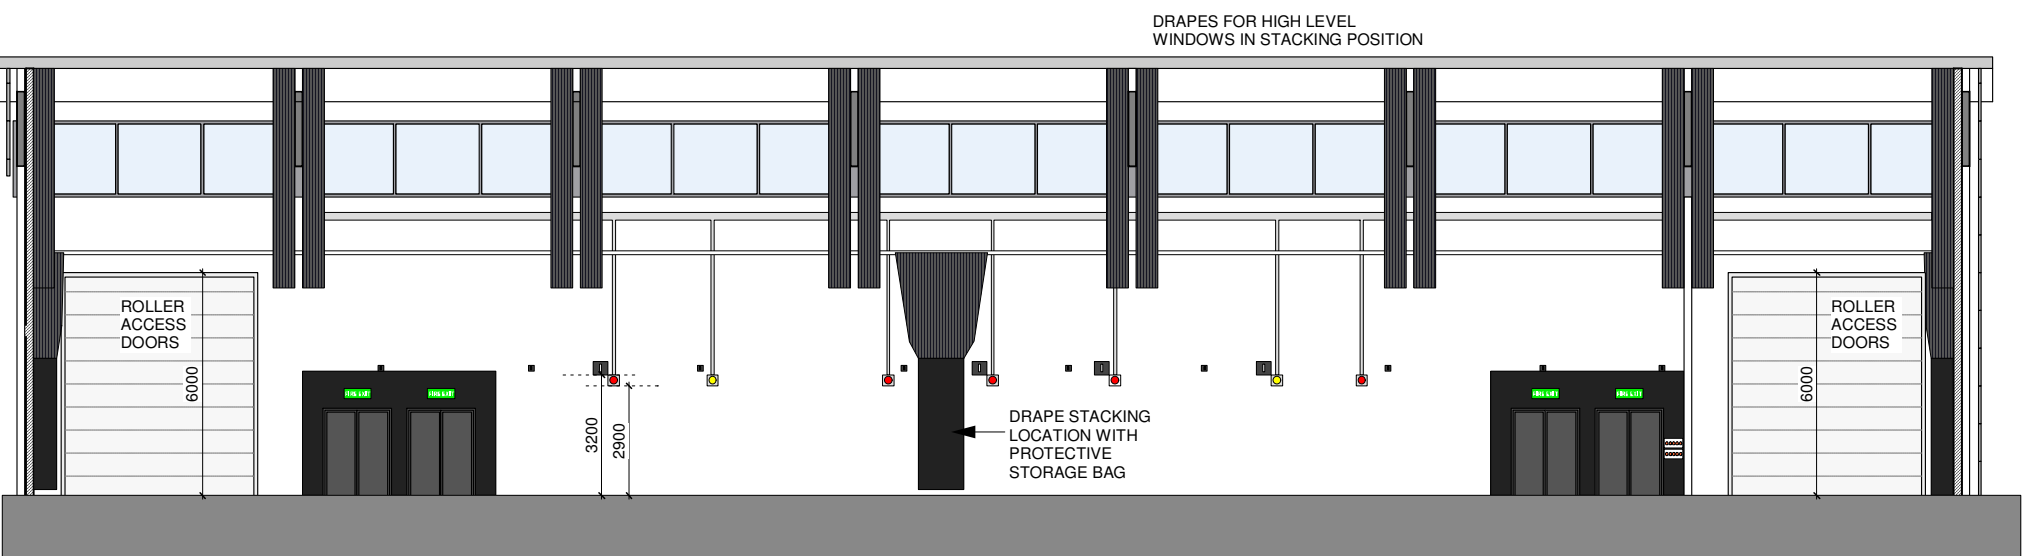

ELEVATION D

THE HUB - INTERNAL ELEVATIONS / SECTIONS

